


## Uncoated CTMP board, UC2

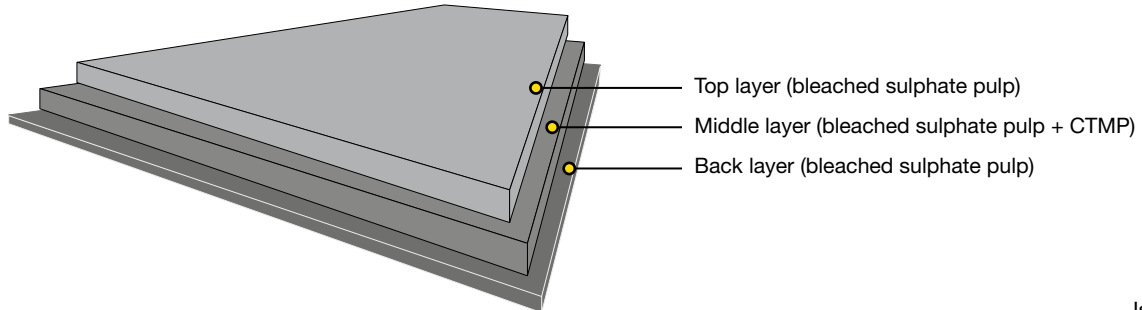

Issued: 05.2018  
 Cancels: 04.2018

### Technical specification

Property / Unit								Standards
Grammage, g/m <sup>2</sup>	230	240	256	265	281	297	363	ISO 536
Thickness, µm	370	402	425	450	465	505	578	ISO 534
Bending moment Taber 15° MD, mNm	15.3	19.8	22.9	28.0	30.7	36.7	52.2	ISO 2493
Bending moment Taber 15° CD, mNm	5.8	7.9	9.2	10.9	11.9	14.3	19.8	
Bending resistance L&W 15° MD, mN	317	415	477	580	635	760	1080	
Bending resistance L&W 15° CD, mN	120	162	188	223	242	303	410	
Brightness D65/10°, Top	79	79	79	79	79	79	79	ISO 2470-2
Surface Smoothness, Bendtsen, ml/min	350	350	350	350	350	400	400	ISO 8791-2
Scott Bond, J/m <sup>2</sup>	230	230	230	230	230	230	230	TAPPI 569

All properties according to Imatra Mill measurements.

Test climate 23°C/50% RH (according to ISO 187). In order to verify, reel/pallet average shall be based on 5 single measurements randomly sampled within the reel/pallet. These averages will be for at least 19 of 20 reels/pallets within the specification limits.

#### Certificates

Quality management ISO 9001  
 Environmental management ISO 14001  
 Product safety FSC 22000  
 Health and safety OHSAS 18001  
 Energy management ISO 50001  
 Forest certification and Chain-of-Custody, FSC® (logo licence number FSC-C105192), PEFC™ (logo licence number PEFC/02-31-71)

Paperboard is recyclable 